

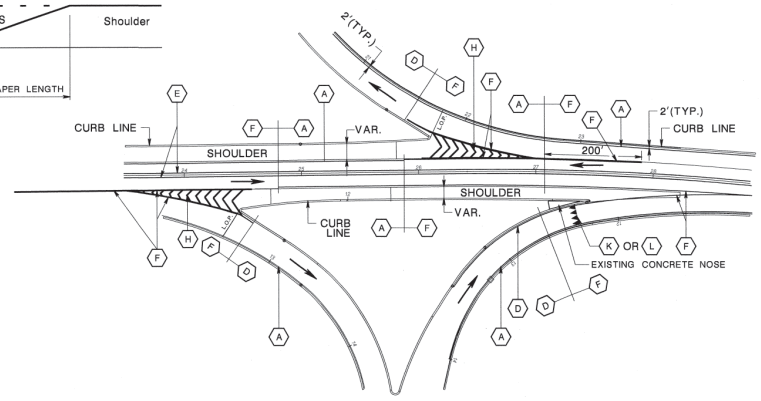


- NOTES:**
- BEFORE THE RESURFACING OPERATION COMMENCES, THE CONTRACTOR SHOULD INVENTORY ALL SIGNS AND STRIPING AND REPLACE THEM IN KIND UNLESS SPECIFIED ON THE TRAFFIC SIGNING AND STRIPING PLANS.
 - STOP LINES AND YIELD TRIANGLES SHALL BE INSTALLED IN LINE WITH THE EXISTING STOP SIGNS AND YIELD SIGNS.
 - RAISED PAVEMENT MARKERS SHALL BE INSTALLED ON ROUTE 33 WITHIN THE PROJECT LIMIT IN ACCORDANCE WITH CD-610 OF THE 2007 ROADWAY CONSTRUCTION DETAILS.

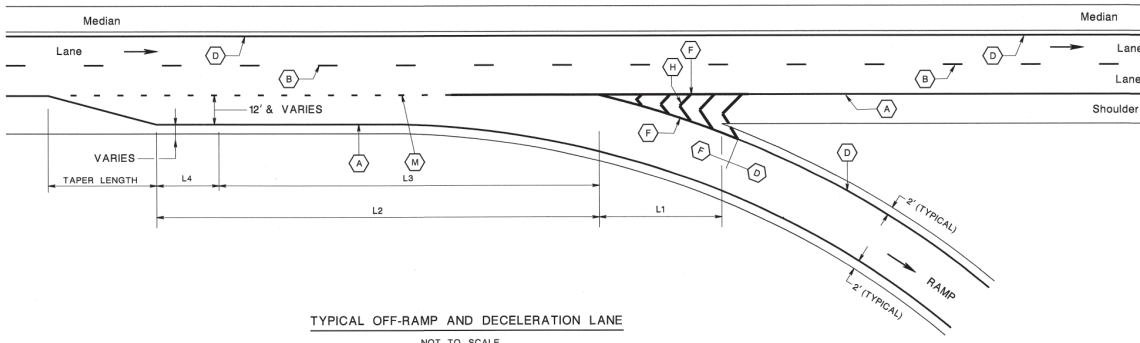

- LEGEND**
- (A) 4" SOLID WHITE LINE
 - (B) 4" DASHED WHITE LINE
 - (C) 4" DASHED YELLOW LINE
 - (D) 4" SOLID YELLOW LINE
 - (E) 2 - 4" SOLID YELLOW LINES
 - (F) 8" SOLID WHITE LINE
 - (G) 12" SOLID WHITE LINE
 - (H) 24" SOLID WHITE LINES SPACED 12' c to c @ 45°
 - (I) 24" SOLID YELLOW LINES SPACED 12' c to c @ 45°
 - (J) 4" DASHED WHITE LINES 2' LINE WITH 6' SPACE
 - (K) 24" SOLID WHITE LINE
 - (L) 18" (b) X 24" (h) YIELD LINES
 - (M) 6" DASHED WHITE LINES 3' LINE WITH 9' SPACE
 - (N) 2 - 4" DASHED YELLOW LINES 2' LINE WITH 6' SPACE
 - (O) 8" DASHED WHITE LINES 2' LINE WITH 6' SPACE



NEW JERSEY DEPARTMENT OF TRANSPORTATION

TRAFFIC SIGNING AND STRIPING PLANS
ROUTE 33
CONTRACT NO. 040124050

pen table = \\vdorpprwa\workspace\pilot\pilot\plan\lane-roadway\basic.dwg
 scale = 30.00000000.00000000
 date = 15-MAY-2017 08:59
 ID = TTDSTN1

NJDOT Highway & Traffic Design